

# Target model U2A

Target from Kongsberg Mikroelektronikk AS, designed for 100-300m ranges with high calibrated ammunition.


Normal aiming points and animal targets can be mounted.

The target frame is made of solid wood.

3 sensors are mounted at the bottom of the target, with the inspection opening in front.

The lowest 20 cm of the acoustic measuring chamber, has to be covered in front in order to secure the sensors.

The target has an adjustable horizontal rubber band to seal the acoustic chamber.

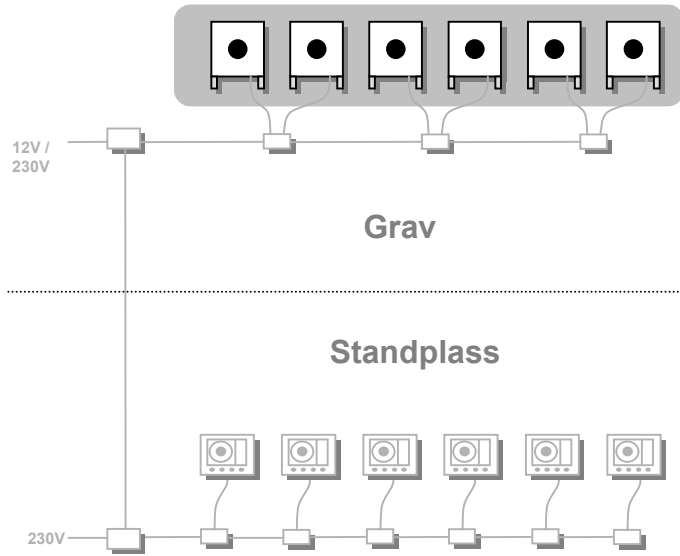


## Recommended use :

- 100m – 200m - 300m, high calibrated.
- Running target

## Technical :

### Dimensions:


- A ..... 1300 mm
- B ..... 1300 mm
- C ..... 500 mm
- D ..... 300 mm
- E ..... 70 mm
- F ..... 47 mm
- G ..... 120 mm



- Temperature range ..... -30 til + 60°C
- Horizontal rubber band ..... 3 x 400 mm
- Weight..... Approx. 30 kg

## Supplementary equipment :

- Running target

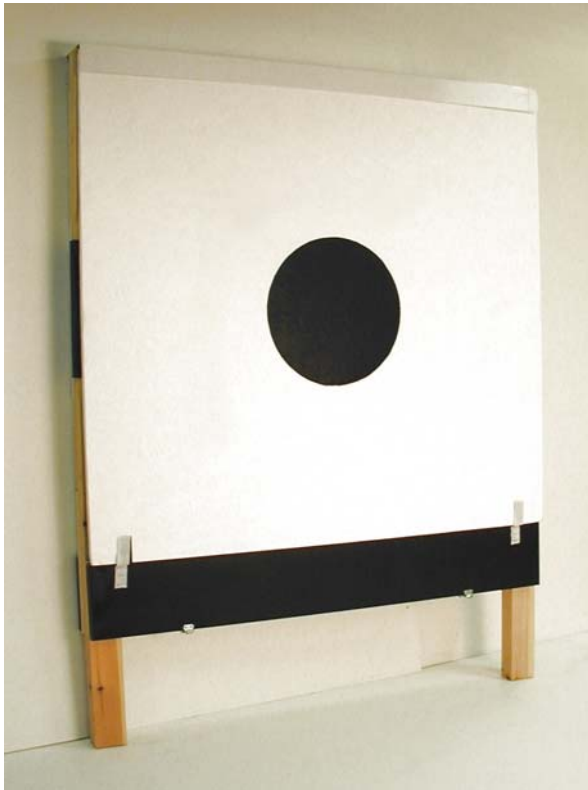

**Electronic Target Systems**  
 6 South Farm Court  
 Budleigh Salterton  
 Devon EX9 7AY  
 01395 442777 (Office)  
 0208 878 1716 (Technical)  
 01395 446233 (Fax)  
 Email: info@etsys.co.uk